



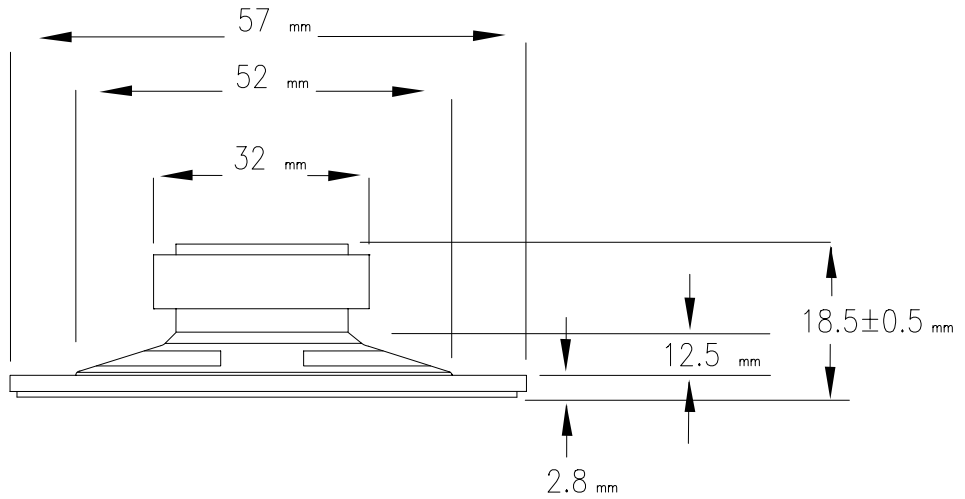

Specifications

1	Part No.	GF0571			
2	Nominal Size	57 mm.	2 - 1/4 inch		
3	Impedance	8 Ω \pm 15%	at 800 Hz. 1 V.		
4	Resonance	380 Hz. \pm 76 Hz.	F0 Hz. 1 V.		
5	S.P. Level	86 dB \pm 3 dB	0.25 w. 50 cm. average at		
6	Response	fo Hz. \sim 8.1K Hz. MAX 10dB	1K, 1.4K, 1.7K, 2K Hz.		
7	Crossover Freq.	Hz. Hz.	dB/OCT Net work		
8	Input Power	Nominal Input 0.25 w.	Handling Capacity 0.5 w.		
9	Operation	Must be normal at program source		0.25 w.	
10	Buzz, Rattle, etc.	Must be normal at sine wave		1.41 v.	
11	Flux Density	Gauss \pm 10%			
12	Total Flux	Max well min			
13	Magnet	Size 32 x 18 x 6 mm	gr	oz	
14	Total Weight			gr	oz
15	Load Test	After test meet item 9 and 10		White noise 0.25 W.	5 Hours
16	Distortion	% MAX		Hz	W.
17	Heat Test	After test meet item 9 and 10		70 \pm 2 \pm °C	20-50 %R.H. 5 Hours
18	Humidity Test	After test meet item 9 and 10		40 \pm 2 \pm °C	90-95 %R.H. 5 Hours

PART NO.	GF0571	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

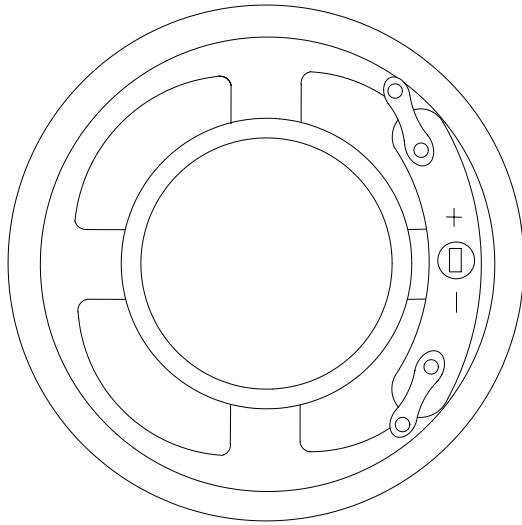

CUI STACK

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 643-6129
 Website: www.cuistack.com

TITLE:	
PART NO.	UNITS:
GF0571	mm
DRAWN BY:	Page No.
	2 of 2